

# TUE FF PN16

Fiksna prirubnica, s ozubljenim nastavkom, PN10/16, čelik VZ

**HANSA FLEX**

## Karakteristike


**Priključak 1** fiksna prirubnica  
za stupanj tlaka PN16

**Oblik izrade** ravno

**Oblik brtve 1** plosnato brtvljenje

**Područje primjene** Industrija

**Norma** DIN EN 1092-1

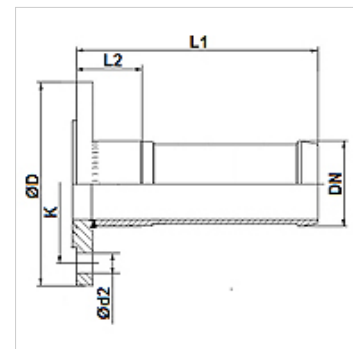

## Artikli

Naziv	DN*	Veličina	Col	Ø D (mm)	K (mm)	Ø d2 (mm)	N (mm)
TUE 20 FF PN16	20	12	3/4"	105,0	75	14	4
TUE 25 FF PN16	25	16	1"	115,0	85	14	4
TUE 32 FF PN16	32	20	1.1/4"	140,0	100	18	4
TUE 38 FF PN16	40	24	1.1/2"	150,0	110	18	4
TUE 50 FF PN16	50	32	2"	165,0	125	18	4
TUE 63 FF PN16	63	40	2.1/2"	185,0	145	18	4
TUE 75 FF PN16	75	50	3"	200,0	160	18	8
TUE 102 FF PN16	100	64	4"	220,0	180	18	8

N = broj rupa

## Pribor

**KS AL** Stezna ljuska, aluminijska

**KS FIX AL** Stezna ljuska za spajanje zatikom, aluminij

## Dodatni elementi

**FD C4400** Plosnata brtva