



# K-SCHL-AUFROLLER LUFT

Hose reels for compressed air

**HANSA FLEX**

## Karakteristike

|                          |  |
|--------------------------|--|
| <b>Materijal crijeva</b> | Braided polyurethane                         |
| <b>Radni tlak</b>        | Max. 16 bar; 13.5 x 9.5 mm hose: max. 12 bar |
| <b>Radna temperatura</b> | -20 °C to +60 °C                             |
| <b>Zakretni kut</b>      | 300°   |

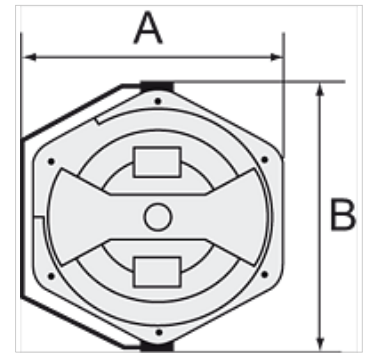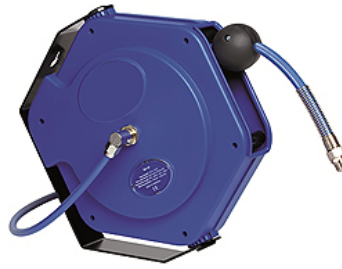

## Napomena

Drugi podatci na zahtjev.

## Opis

For easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose (not Art. K-07100618).

## Dodatne informacije

Housing of K-07100621, K-07100620 and K-07100618 identical to K-07100614

## Artikli

| Naziv          | Dimenzije crijeva | A<br>(mm) | B<br>(mm) | Duljina crijeva<br>(m) |
|----------------|-------------------|-----------|-----------|------------------------|
| K- 07 10 06 18 | 12 mm x 8 mm      | 394,5     | 436,0     | 7                      |
| K- 07 10 06 19 | 12 mm x 8 mm      | 361,0     | 390,0     | 10                     |
| K- 07 10 06 20 | 12 mm x 8 mm      | 394,5     | 436,0     | 16                     |
| K- 07 10 06 21 | 13,5 mm x 9,5 mm  | 394,5     | 436,0     | 14                     |