
K-SPIR SCHL KUPPL SET

Spiral hose and coupling kits

Karakteristike

Radni tlak	max. 10 bar (to the temperature +20 °C); max. 7 bar (at temperature +40 °C); max. 5 bar (at temperature +60 °C)
Spojka	High quality hand quick release coupling of steel for high flow rates For demanding applications with high mechanical wear
Spiralno crijevo	Polyurethane

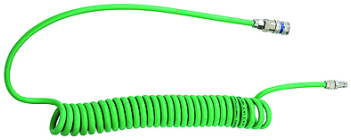

Napomena

Drugi podatci na zahtjev.

Opis

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

Artikl

Naziv	Dimenzije crijeva	Ø spirale (mm)	Radna duljina (m)
K- 07 10 07 56	10 mm x 6,5 mm	52	4,0
K- 07 10 07 57	10 mm x 6,5 mm	52	6,0
K- 07 10 07 58	12 mm x 8 mm	65	8,0

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.