

# K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

**HANSA FLEX**

## Karakteristike

**Karakteristike** Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%)  
Connection of compressed air and vacuum with push-in coupling  
Basic housing with connection facility for a vacuum switch  
Maximum suction capacity with minimum compressed air consumption  
Minimum size, low weight  
Various power ratings for optimised air consumption



**Primjena** For universal use in handling systems with very high dynamic movements  
Handling all kinds of air-tight components  
For use in separation systems where space is restricted.  
Construction of ejector blocks for centralised or decentralised individual control of suction pads.

**Sustav sapnica** Brass

**Priključak** Push-in coupling

**Prigušivač zvuka** Plastic

**Osnovno tijelo** Impact-resistant plastic

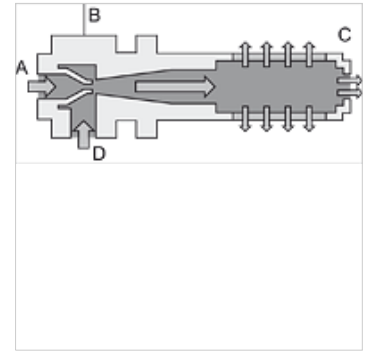

## Napomena

Drugi podatci na zahtjev.

## Opis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Artikli

| Naziv          | Veličina sapnice | Položaj mirovanja usisnog ventila | Priključak za komprimirani zrak | Vakuumski priključak | Dimenzije           |
|----------------|------------------|-----------------------------------|---------------------------------|----------------------|---------------------|
| K- 07 45 01 20 | 1,0              | NO                                | 6 mm                            | 8 mm                 | 142mm x 15mm x 50mm |
| K- 07 45 01 22 | 1,5              | NO                                | 6 mm                            | 8 mm                 | 142mm x 15mm x 50mm |
| K- 07 45 01 24 | 2,0              | NO                                | 8 mm                            | 10 mm                | 228mm x 20mm x 72mm |
| K- 07 45 01 26 | 2,5              | NO                                | 8 mm                            | 10 mm                | 228mm x 20mm x 72mm |

## Pribor

|                          |                       |
|--------------------------|-----------------------|
| K-ERSATZSCHALLDAEMPFER 1 | Replacement silencers |
| K-GRUNDPLATTEN 1         | Base plate            |
| K-BEFESTIGUNGSSAETZE 1   | Mounting kit          |