

# K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

## Karakteristike

| | |
|---|---|
| **Primjena** | For handling of workpieces with sloping using large-area vacuum gripper<br>Handling of large plates that can sag when lifting<br>In combination with spring plungers to compensate height-differences and Uneveness |
| **Posebna obilježja** | very good adaptation to oblique workpiece surfaces<br>automatic Rückstellung in die Ausgangslage<br>vacuum-tight design with integrated protection against damage |

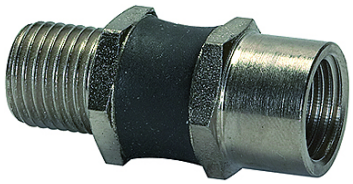

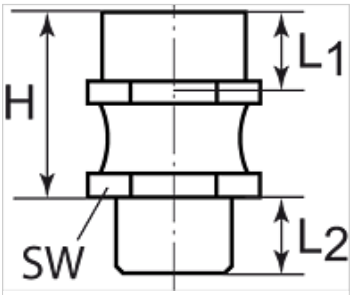


## Napomena

Drugi podatci na zahtjev.

## Opis

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

## Artikl

| Naziv | Unutarnji navoj 1 | Vanjski navoj 2 | H (mm) | Materijal | L1 (mm) | L2 (mm) | Kut W (°) | Okomito opterećenje (N/m2) | Moment savijanja (N/m2) | SW (mm) |
|---|---|---|---|---|---|---|---|---|---|---|
| **K- 07 45 01 47** | G 1/4 | M 10 x 1.25 | 27,0 | Steel, rubber | 10,5 | 8,0 | 12 | 500 | 8,0 | 17 |
| **K- 07 45 01 48** | G 1/4 | G 1/4 | 27,0 | Steel, rubber | 12,0 | 12,0 | 12 | 750 | 10,0 | 17 |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*