


K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

HANSA FLEX

Karakteristike

Izvedba	PNP
Priključak za mjerni medij	G 1/8 male and M 5 female
Histereza	Adjustable: 3 to 25% of set value
Temperaturno područje	0 - 50 °C
Mediji	Non-aggressive gases. dry, oil-free air
Kućište	Polycarbonate
Izlazni signal	Analogue: 1 to 5 V
Električni priključak	Male connector M8, four pin
Uklopni kapacitet	125 mA
Potrošnja struje	30 mA
Prikaz stanja	LED

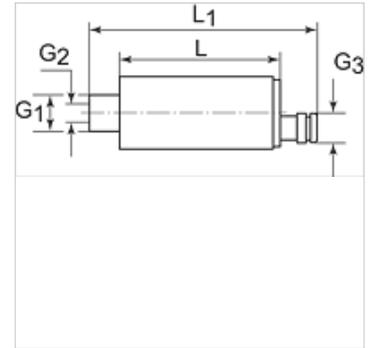

Napomena

Drugi podatci na zahtjev.

Opis

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use. Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

Artikli

Naziv	Vanjski navoj 1	Unutarnji navoj 2	Vanjski navoj 3	L (mm)	L1 (mm)	Mjerno područje	Napon
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC