


K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

HANSA FLEX

Karakteristike

| | |
|------------------------------|---|
| Primjena | Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC |
| Mediji | dry, oil-free air and non-aggressive gases |
| Temperaturno područje | 0 - 50 °C |
| Izlazni signal | 1 to 5 analogous to V |
| Histereza | Fixed: 20 mbar (model with digital sensor) |
| Duljina kabela | 3 m |
| Vrsta zaštite | IP 40 |

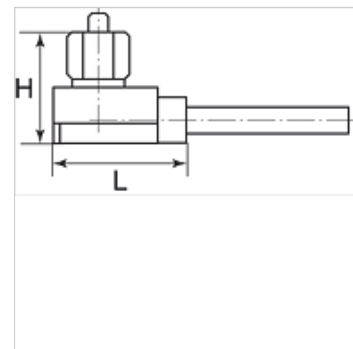

Napomena

Drugi podatci na zahtjev.

Opis

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Artikl

| Naziv | Priključak | H (mm) | L (mm) | Mjerno područje | Napon |
|----------------|------------|-----------|-----------|-----------------|--------------|
| K- 07 45 01 57 | M 5 male | 16,9 | 21,0 | -1 bis 0 bar | 10 - 24 V DC |