K-DRV

Unidirectional flow control valves

Karakteristike

Radni tlak	maks. 10 bar
Radna temperatura	max. +70 °C
Brtveni materijal	NBR
Kućište	Alu eloxed
Unutarnji dijelovi	Brass

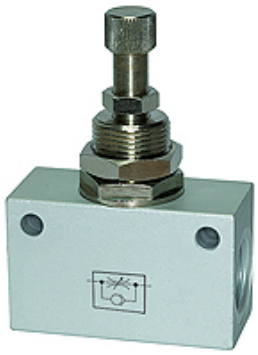

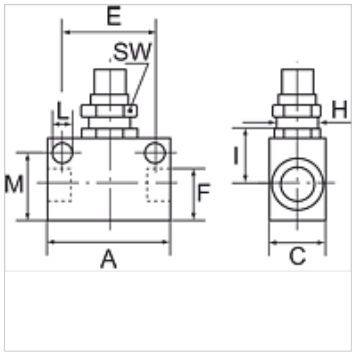

Napomena

Drugi podatci na zahtjev.

Opis

These valves are restricted in the flow direction and have free passage in the opposite direction.

Artikl

Naziv	Navoj	A (mm)	C (mm)	E (mm)	H dimenzije	I (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 36	M 5	25,0	12,0	18,0	M 9 x 0.75 mm	10,0	3,2	12,2	11
K- 07 30 12 37	G 1/8	34,0	16,0	24,0	M 12 x 0.75 mm	15,0	4,5	16,4	15
K- 07 30 12 38	G 1/4	50,0	25,0	35,0	M 18 x 1.5 mm	24,0	6,5	23,8	22
K- 07 30 12 39	G 3/8	58,0	25,0	40,0	M 18 x 1.5 mm	24,0	6,5	25,3	22
K- 07 30 12 40	G 1/2	65,0	30,0	50,0	M 22 x 1.5 mm	29,0	6,5	33,0	26

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.