


K-DRV

Unidirectional flow control valves

Karakteristike

Radni tlak	maks. 10 bar
Radna temperatura	max. +70 °C
Brtnveni materijal	NBR
Kućíšte	Alu eloxed
Unutarnji dijelovi	Brass

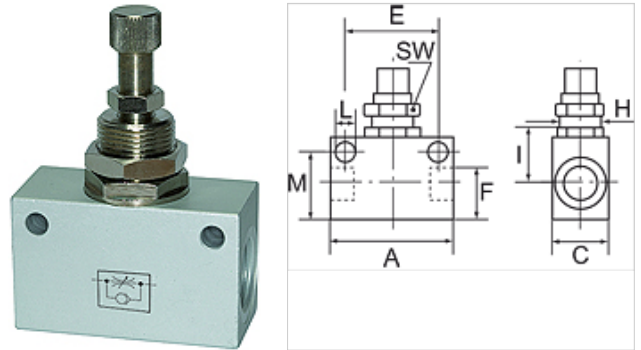

Napomena

Drugi podatci na zahtjev.

Opis

These valves are restricted in the flow direction and have free passage in the opposite direction.

Artikli

Naziv	Navoj	A (mm)	C (mm)	E (mm)	H dimenzije	I (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 36	M 5	25,0	12,0	18,0	M 9 x 0.75 mm	10,0	3,2	12,2	11
K- 07 30 12 37	G 1/8	34,0	16,0	24,0	M 12 x 0.75 mm	15,0	4,5	16,4	15
K- 07 30 12 38	G 1/4	50,0	25,0	35,0	M 18 x 1.5 mm	24,0	6,5	23,8	22
K- 07 30 12 39	G 3/8	58,0	25,0	40,0	M 18 x 1.5 mm	24,0	6,5	25,3	22
K- 07 30 12 40	G 1/2	65,0	30,0	50,0	M 22 x 1.5 mm	29,0	6,5	33,0	26