


K-DRS ELK GERAETESTECKER

Pressure switches, connection with plug connector, type A acc. to DIN 43650

HANSA FLEX

Karakteristike

| | |
|-----------------------|-------------------------------------|
| Područje primjene | Pneumatic applications |
| Učestalost uklapanja | 200/min. |
| Uklopni napon | max. 250 V AC / 28 V DC |
| Vrsta zaštite | IP 65 (DIN 43650), IP 67 (M 12 x 1) |
| Temperaturno područje | -10 °C to +80 °C |
| Čep za namještanje | Aluminium, powder-coated |
| Kućiče | Special die-cast material |
| Membrana, brtva | NBR |

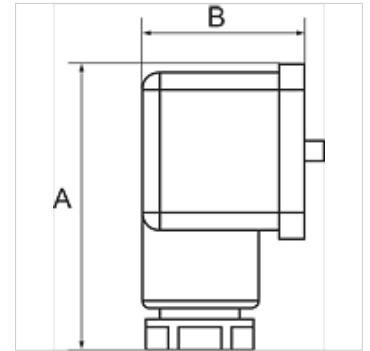

Napomena

Drugi podatci na zahtjev.

Opis

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

Artikli

| Naziv | Priključak | Područje namještanja | A (mm) | B (mm) |
|----------------|------------|----------------------|-----------|-----------|
| K- 07 30 28 45 | G 1/4 | 0,2 - 2,0 bar | 48,0 | 28,0 |
| K- 07 30 28 46 | G 1/4 | 0,5 - 8,0 bar | 48,0 | 28,0 |
| K- 07 30 28 47 | G 1/4 | 1,0 - 16,0 bar | 48,0 | 28,0 |