
K-DRS ELK GERAETESTECKER

Pressure switches, connection with plug connector, type A acc. to DIN 43650

Karakteristike

Područje primjene	Pneumatic applications
Učestalost uklapanja	200/min.
Uklopni napon	max. 250 V AC / 28 V DC
Vrsta zaštite	IP 65 (DIN 43650), IP 67 (M 12 x 1)
Temperaturno područje	-10 °C to +80 °C
Čep za namještanje	Aluminium, powder-coated
Kućište	Special die-cast material
Membrana, brtva	NBR



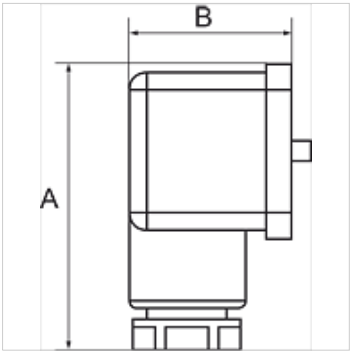

Napomena

Drugi podatci na zahtjev.

Opis

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

Artikl

Naziv	Priključak	Područje namještanja	A (mm)	B (mm)
K- 07 30 28 45	G 1/4	0,2 - 2,0 bar	48,0	28,0
K- 07 30 28 46	G 1/4	0,5 - 8,0 bar	48,0	28,0
K- 07 30 28 47	G 1/4	1,0 - 16,0 bar	48,0	28,0

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.