
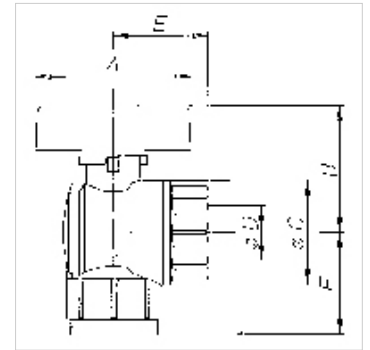


# K-BKR ECKFORM IG AG 1

Ball valves, angle type, female/female thread

## Karakteristike

<b>Područje primjene</b>	Gas, compressed air, water, oil, weak alkaline solutions
<b>Radni tlak</b>	Liquids: 40/32 bar depending on the port size; Gas: max. 5 bar (MOP 5)
<b>Radna temperatura</b>	-15 °C to +100 °C for liquids; -15 °C to +60 °C for gas
<b>Opis navoja</b>	R or RP thread acc. to ISO 7-1
<b>Kućište, unutarnji dijelovi</b>	Nickel-plated brass
<b>Poluga</b>	Aluminium, painted yellow
<b>Brtva kugle</b>	PTFE
<b>Brtva vretena</b>	NBR



## Napomena

Drugi podatci na zahtjev.

## Artikli

Naziv	DN	Navoj	PN (bar)	A (mm)	B (mm)	Ø C (mm)	E (mm)	F (mm)
K- 07 30 20 42	15	Rp 1/2	40	47,0	38,0	31,0	31,0	33,0
K- 07 30 20 43	20	Rp 3/4	40	56,0	46,0	39,0	35,0	38,0
K- 07 30 20 44	25	Rp 1	40	56,0	50,0	48,0	42,0	46,0