



K-BKR ECKFORM AG AG

Ball valves, angle type, male/male thread

HANSA FLEX

Karakteristike

Područje primjene	Gas, compressed air, water, oil, weak alkaline solutions
Radni tlak	Liquids: 40/32 bar depending on the port size; Gas: max. 5 bar (MOP 5)
Radna temperatura	-15 °C to +100 °C for liquids; -15 °C to +60 °C for gas
Opis navoja	R or RP thread acc. to ISO 7-1
Kućište, unutarnji dijelovi	Nickel-plated brass
Poluga	Aluminium, painted yellow
Brtva kugle	PTFE
Brtva vretena	NBR

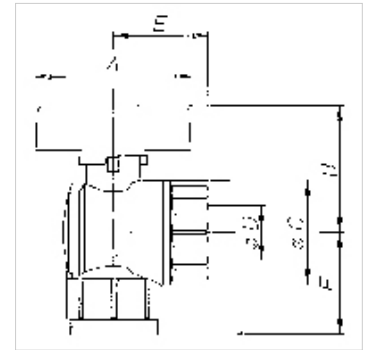

Napomena

Drugi podatci na zahtjev.

Artikli

Naziv	DN	Navoj	PN (bar)	A (mm)	B (mm)	Ø C (mm)	E (mm)	F (mm)
K- 07 30 20 16	15	R 1/2	40	47,0	38,0	31,0	37,0	35,0
K- 07 30 20 17	20	R 3/4	40	56,0	46,0	38,5	43,0	40,0
K- 07 30 20 18	25	R 1	40	56,0	50,0	48,0	51,0	48,0