


K-BKR FEINEINSTELLUNG

Ball valves

HANSA FLEX

Karakteristike

Radni tlak	Max. 40 bar
Radna temperatura	-15 °C to +100 °C
Opis navoja	G thread acc. DIN EN ISO 228-1
Kučíšte	Nickel-plated brass (outside); Brass with a bare metal surface (inside)
Ručni ventil	Plastic
Kugla	Chrome-plated brass
Brtva kugle	PTFE
Brtva vretena	NBR

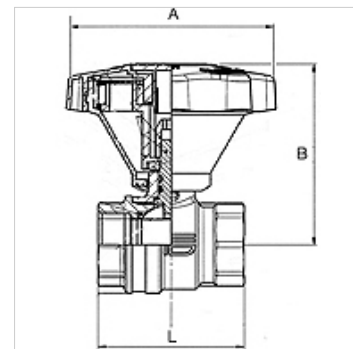

Napomena

Drugi podatci na zahtjev.

Opis

Brass ball valves in the standard series with fine adjustment. Unlike our classic standard ball valves (open-close function), this model features a special stem technology that allows finely modulated opening and closing of the line. The flow rate can be regulated extremely precisely as a result. The cock is made of low-lead brass with a bare brass surface on the inside. It is thus safe to use with drinking water. This valve complies with the European standard EN 13828 and the working paper DVGW W 570.

Artikli

Naziv	DN	Navoj	A (mm)	B (mm)	L (mm)
K- 07 30 00 41	10	G 3/8	83,0	63,0	43,4
K- 07 30 00 42	15	G 1/2	83,0	70,0	50,1
K- 07 30 00 43	20	G 3/4	83,0	76,0	58,0
K- 07 30 00 44	25	G 1	83,0	80,0	68,8
K- 07 30 00 45	32	G 1 1/4	130,0	110,0	81,0
K- 07 30 00 46	40	G 1 1/2	130,0	116,0	93,2
K- 07 30 00 47	50	G 2	130,0	123,0	110,2