


K-MV G 24 V DC Z

Normally closed, 24 V DC (direct current), combined operation

HANSA FLEX

Karakteristike

Električni priključak	For Pg 11P connector socket, acc. to DIN 4400
Vrsta zaštite	IP65 (with connector socket fitted)
Temperatura medija	max. +90 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Kučište, dosjed ventila	Stainless steel
Unutarnji dijelovi	Stainless steel
Brtva	Perbunan (NBR) or FKM

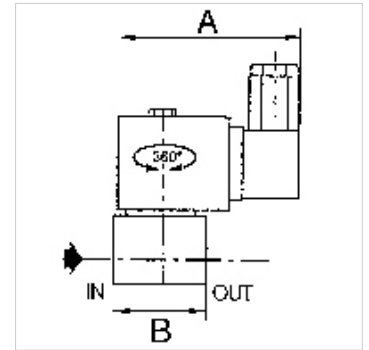

Napomena

Drugi podatci na zahtjev.

Opis

Available versions, Directly operated, Combined operation

Artikli

Naziv	Navoj	maks. radni tlak (bar)	Nazivni promjer	Brtveni materijal	A (mm)	B (mm)	Oblik izrade
K- 07 30 23 59	G 1/2	3	16,0	NBR	80,0	71,0	3
K- 07 30 23 61	G 1/2	3	16,0	FKM	80,0	71,0	3
K- 07 30 23 60	G 3/4	3	16,0	NBR	80,0	71,0	3