

K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

Karakteristike

Električni priključak	For Pg 11P connector socket, acc. to ISO 4400
Vrsta zaštite	IP65 (with connector socket fitted)
Opis navoja	Rp thread acc. to ISO 7-1
Kućište, dosjed ventila	Brass
Unutarnji dijelovi	Stainless steel
Brtva	Perbunan (NBR)



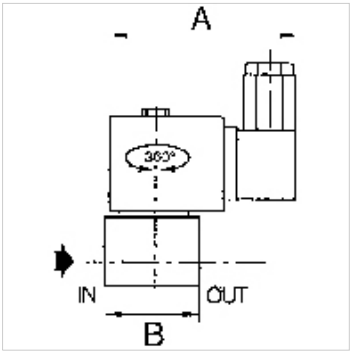

Napomena

Drugi podatci na zahtjev.

Opis

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikl

Naziv	Navoj	maks. radni tlak (bar)	Nazivni promjer	A (mm)	B (mm)	Oblik izrade
K- 07 30 22 52	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 22 53	Rp 1/4	6	3,2	80,0	43,0	10

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.