

K-MV 3/2 24V DC

3/2-way solenoid valves, normally closed, directly operated, 24 V DC (direct current)

Karakteristike

Električni priključak	For Pg 11P connector socket, acc. to ISO 4400
Vrsta zaštite	IP65 (with connector socket fitted)
Opis navoja	Rp thread acc. to ISO 7-1
Kućište, dosjed ventila	Brass
Unutarnji dijelovi	Stainless steel
Brtva	Perbunan (NBR)



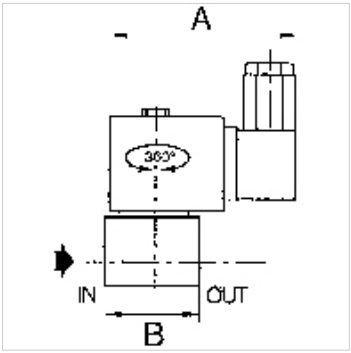

Napomena

Drugi podatci na zahtjev.

Opis

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikl

Naziv	Navoj	maks. radni tlak (bar)	Nazivni promjer	A (mm)	B (mm)	Oblik izrade
K- 07 30 23 22	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 23 23	Rp 1/4	4	3,2	80,0	43,0	10

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.