


# K-MV 3/2 ELK

Solenoid valves

**HANSA FLEX**

## Karakteristike

Vrsta zaštite	IP65 (with connector socket fitted)
Temperatura medija	-10 °C to +100 °C
Odzračni priključak	M 5
Primjena	Compressed air and neutral, non-toxic gases, not suitable for liquids
Radni tlak	min. 0,0 bar; max. 15,0 bar
Električni dio	system connection plug, 180° movement, PG7 exchangeable magnetic heads AC/DC
Nazivni promjer	1,2 mm
Okolna temperatura	-10 °C to +60 °C
Kućište	Brass
Unutarnji dijelovi	Stainless steel
Brtve	FPM

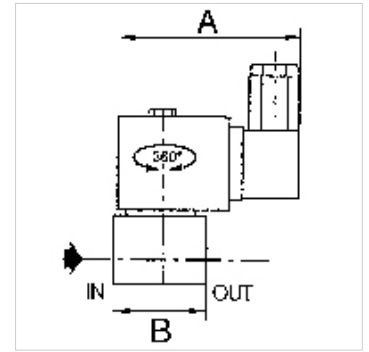

## Napomena

Drugi podatci na zahtjev.

## Opis

Directly operated seat valve with spring return and manual operator. Also suitable for vacuum operation.

## Artikli

Naziv	Navoj	Napon	A (mm)	B (mm)
K- 07 30 22 50	G 1/8	230/50 V AC, 50 Hz	58,0	33,0
K- 07 30 22 51	G 1/8	24 V DC	58,0	33,0