


K-MV O D 24 V DC

Normally open, directly operated, 24 V DC (direct current)



Karakteristike	
Električni priključak	For connector socket Pg 9/Pg 11, acc. to ISO 4400
Vrsta zaštite	IP65 (with connector socket fitted)
Temperatura medija	-10 °C to +90 °C (NBR); -10 °C bis +140 °C (FKM)
Kućište, dosjed ventila	Brass
Unutarnji dijelovi	Stainless steel
Brтва	Perbunan (NBR) or FKM

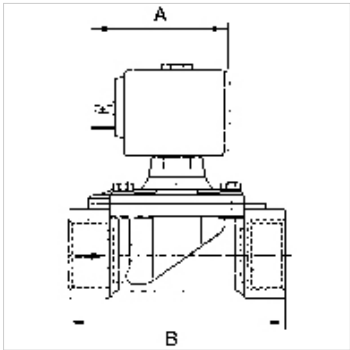

Napomena

Drugi podatci na zahtjev.

Opis

Economy series available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikli							
Naziv	Navoj	maks. radni tlak (bar)	Nazivni promjer	Brtnjeni materijal	A (mm)	B (mm)	Oblik izrade
K- 07 30 23 87	G 1/8	20	2,0	FKM	54,0	40,0	2
K- 07 30 23 88	G 1/8	14	2,5	FKM	54,0	40,0	2
K- 07 30 23 89	G 1/4	10	3,0	FKM	54,0	40,0	2
K- 07 30 23 90	G 1/4	4	4,5	FKM	54,0	40,0	2