


K-MV G D 24 V DC

Normally closed, directly operated, 24 V DC (direct current)

HANSA FLEX

Karakteristike

Električni priključak	ISO 4400. cable socket (Pg 11P)
Vrsta zaštite	IP65 (with connector socket fitted)
Temperatura medija	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Opis navoja	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Kučište, dosjed ventila	Brass
Unutarnji dijelovi	Stainless steel
Brtva	Perbunan (NBR) or FKM

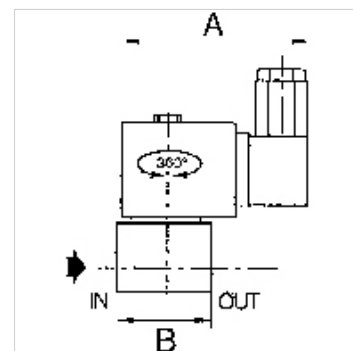

Napomena

Drugi podatci na zahtjev.

Opis

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikl

Naziv	Navoj	maks. radni tlak (bar)	Nazivni promjer	Brtveni materijal	A (mm)	B (mm)	Oblik izrade
K- 07 30 23 08	G 1/8	5	3,2	NBR	75,0	30,0	1
K- 07 30 23 10	G 1/8	5	3,2	FKM	75,0	30,0	1
K- 07 30 23 09	G 1/4	4	3,2	NBR	75,0	40,0	2
K- 07 30 23 11	G 1/4	4	3,2	FKM	75,0	40,0	2