


K-MV G Z 230 V, 50 - 60 HZ 1

Normally closed, combined operation, 230 V, 50 to 60 Hz

HANSA FLEX

Karakteristike

Električni priključak	ISO 4400. cable socket (Pg 11P)
Vrsta zaštite	IP65 (with connector socket fitted)
Temperatura medija	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Opis navoja	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Kućište, dosjed ventila	Brass
Unutarnji dijelovi	Stainless steel
Brtva	Perbunan (NBR) or FKM

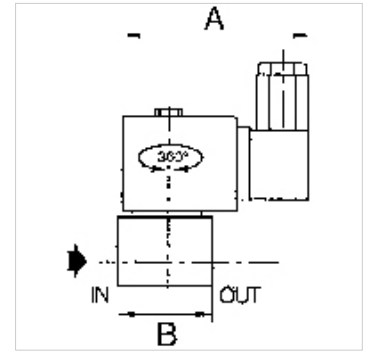

Napomena

Drugi podatci na zahtjev.

Opis

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikli

Naziv	Navoj	maks. radni tlak (bar)	Nazivni promjer	Brtveni materijal	A (mm)	B (mm)	Oblik izrade
K- 07 30 22 84	Rp 3/8	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 90	Rp 3/8	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 85	Rp 1/2	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 91	Rp 1/2	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 86	Rp 3/4	9	19,0	NBR	80,0	70,0	3
K- 07 30 22 92	Rp 3/4	9	19,0	FKM	80,0	70,0	3
K- 07 30 22 87	Rp 1	9	25,0	NBR	86,0	95,0	3
K- 07 30 22 93	Rp 1	9	25,0	FKM	86,0	95,0	3
K- 07 30 22 88	Rp 1 1/4	9	28,0	NBR	86,0	95,0	3
K- 07 30 22 89	Rp 1 1/2	9	32,0	FKM	86,0	111,0	3