



K-RD SCHRAEGSITZ MS

Unidirectional valves

HANSA FLEX

Karakteristike

| | |
|--------------------|----------------------------|
| Radni tlak | maks. 10 bar |
| Opis navoja | Rp thread acc. to DIN 2999 |
| Temperatura medija | max. +80 °C |
| Tlak otvaranja | min. 0.5 bar |
| Okolna temperatura | Max. +80 °C |
| Brtnveni materijal | NBR |
| Kućište | Brass |

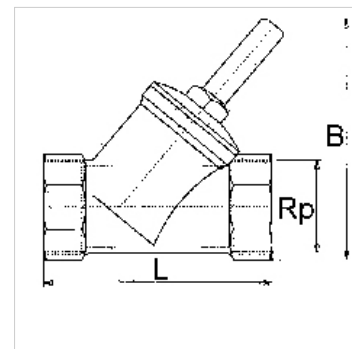

Napomena

Drugi podatci na zahtjev.

Artikli

| Naziv | Navoj | B (mm) | L (mm) | SW (mm) |
|----------------|----------|-----------|-----------|------------|
| K- 07 30 24 75 | Rp 3/8 | 50,0 | 55,0 | 27 |
| K- 07 30 24 76 | Rp 1/2 | 50,0 | 59,0 | 27 |
| K- 07 30 24 77 | Rp 3/4 | 60,0 | 67,0 | 32 |
| K- 07 30 24 78 | Rp 1 | 71,0 | 83,0 | 38 |
| K- 07 30 24 79 | Rp 1 1/4 | 97,0 | 96,0 | 48 |
| K- 07 30 24 80 | Rp 1 1/2 | 114,0 | 106,0 | 54 |
| K- 07 30 24 81 | Rp 2 | 135,0 | 130,0 | 68 |