


# K-SSV BR

Angle-seat valves with piston actuator

**HANSA FLEX**

## Karakteristike

Diferencijalni tlak	0 - 16 bar
Temperatura medija	-10 °C to +180 °C
Priključak za upravljački zrak	G 1/8
Temperatura upravljačkog medija	max. +60 °C
Okolna temperatura	-20 °C to +70 °C
dopušten statički tlak	Max. 16 bar
Kučište ventila	Bronze
Spojni element	Stainless steel
Upravljačka glava	Polyamide (glass fibre-reinforced)
Klip	Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50)
Vreteno	Stainless steel
Brtveni materijal	PTFE

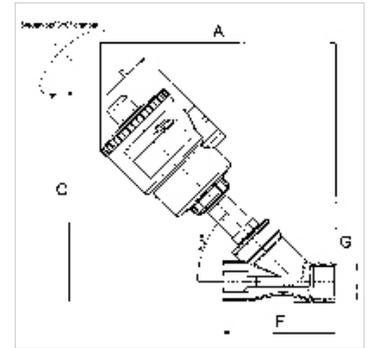

## Napomena

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Drugi podatci na zahtjev.

## Opis

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

## Dodatne informacije

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

## Artikli

Naziv	A (mm)	C (mm)	F (mm)	Navoj	maks. razlika radnog tlaka (bar)	min. upravljački tlak	maks. upravljački tlak
K- 07 30 25 24	163,0	153,0	65,0	G 1/2	16	4	10
K- 07 30 25 25	173,0	163,0	75,0	G 3/4	10	4	10
K- 07 30 25 26	191,0	181,0	75,0	G 3/4	16	4	10
K- 07 30 25 27	206,0	196,0	90,0	G 1	11	4	10
K- 07 30 25 28	246,0	236,0	90,0	G 1	16	4	8
K- 07 30 25 29	255,0	245,0	110,0	G 1 1/4	14	4	8
K- 07 30 25 30	270,0	264,0	120,0	G 1 1/2	11	4	8
K- 07 30 25 31	306,0	300,0	120,0	G 1 1/2	16	4	8
K- 07 30 25 32	316,0	311,0	150,0	G 2	10	4	8