


# K-SSV BR

Angle-seat valves with piston actuator

**HANSA FLEX**

## Karakteristike

|                                 |   |
|---------------------------------|---|
| Diferencijalni tlak             | 0 - 16 bar  |
| Temperatura medija              | -10 °C to +180 °C   |
| Priključak za upravljački zrak  | G 1/8   |
| Temperatura upravljačkog medija | max. +60 °C   |
| Okolna temperatura              | -20 °C to +70 °C  |
| dopušten statički tlak          | Max. 16 bar   |
| Kučište ventila                 | Bronze  |
| Spojni element                  | Stainless steel   |
| Upravljačka glava               | Polyamide (glass fibre-reinforced)                                  |
| Klip                            | Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50) |
| Vreteno                         | Stainless steel   |
| Brtveni materijal               | PTFE  |

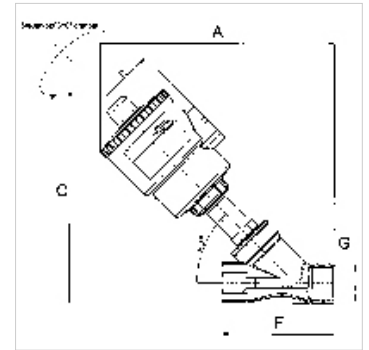

## Napomena

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Drugi podatci na zahtjev.

## Opis

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

## Dodatne informacije

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

## Artikli

| Naziv          | A<br>(mm) | C<br>(mm) | F<br>(mm) | Navoj   | maks. razlika radnog tlaka<br>(bar) | min. upravljački tlak | maks. upravljački tlak |
|----------------|-----------|-----------|-----------|---------|-------------------------------------|-----------------------|------------------------|
| K- 07 30 25 24 | 163,0     | 153,0     | 65,0      | G 1/2   | 16                                  | 4                     | 10                     |
| K- 07 30 25 25 | 173,0     | 163,0     | 75,0      | G 3/4   | 10                                  | 4                     | 10                     |
| K- 07 30 25 26 | 191,0     | 181,0     | 75,0      | G 3/4   | 16                                  | 4                     | 10                     |
| K- 07 30 25 27 | 206,0     | 196,0     | 90,0      | G 1     | 11                                  | 4                     | 10                     |
| K- 07 30 25 28 | 246,0     | 236,0     | 90,0      | G 1     | 16                                  | 4                     | 8                      |
| K- 07 30 25 29 | 255,0     | 245,0     | 110,0     | G 1 1/4 | 14                                  | 4                     | 8                      |
| K- 07 30 25 30 | 270,0     | 264,0     | 120,0     | G 1 1/2 | 11                                  | 4                     | 8                      |
| K- 07 30 25 31 | 306,0     | 300,0     | 120,0     | G 1 1/2 | 16                                  | 4                     | 8                      |
| K- 07 30 25 32 | 316,0     | 311,0     | 150,0     | G 2     | 10                                  | 4                     | 8                      |