


# K-W45 STUECK IG IG RP-GEW

45° elbows, female-female, Rp thread acc. to ISO 7-1

**HANSA FLEX**

## Karakteristike

Radni tlak	maks. 20 bar
Radna temperatura	Max. 175 °C
Unutarnji navoj	Rp-thread acc. ISO 7-1
Materijal	Stainless steel 1.4401 / 1.4408

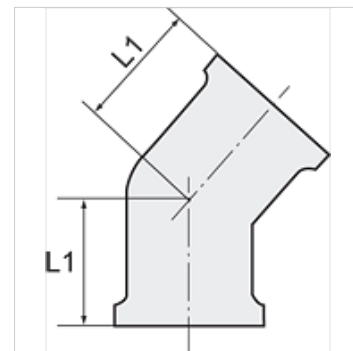

## Napomena

Drugi podatki na zahtjev.

## Artikli

Naziv	Navoj	L1 (mm)
K- 07 40 10 42	Rp 1/8	15,6
K- 07 40 10 43	Rp 1/4	15,9
K- 07 40 10 44	Rp 3/8	17,6
K- 07 40 10 45	Rp 1/2	19,2
K- 07 40 10 46	Rp 3/4	22,8
K- 07 40 10 47	Rp 1	26,7