


K-W90 SCHLAUCH VB STU POM

Hose union elbows, POM

HANSA FLEX

Karakteristike

Temperaturno področje -40 °C to +90 °C

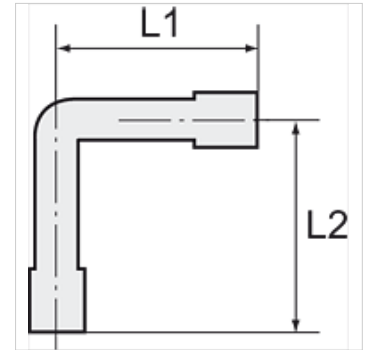

Napomena

Drugi podatki na zahtjev.

Opis

Lightweight tube connectors distinguished by high strength, toughness, resistance to abrasion and impact resistance. Resistant to: Acetone, benzene, benzene, butane, alcohols, diesel fuels, crude oil, natural gas, ethanol, fruit juices, glycerine, fuel oil, hydraulic fluids, aliphatic ketones, carbon dioxide, carbonic acid, engine oils, methanol, propane, liquefied gas, lubricating oils, lubricating greases, town gas, washing liquor and water.

Artikli

| Naziv | za crijevo | L1 (mm) | L2 (mm) | maks. dopušteni pretlak (bar) |
|----------------|------------|------------|------------|----------------------------------|
| K- 07 40 17 18 | LW 3 mm | 12,5 | 12,5 | 10 |
| K- 07 40 17 19 | LW 4 mm | 17,5 | 19,5 | 10 |
| K- 07 40 17 20 | LW 5 mm | 21,0 | 22,0 | 10 |
| K- 07 40 17 21 | LW 6 mm | 25,0 | 26,0 | 10 |
| K- 07 40 17 22 | LW 8 mm | 29,0 | 30,0 | 10 |
| K- 07 40 17 23 | LW 10 mm | 31,0 | 33,5 | 10 |
| K- 07 40 17 24 | LW 12 mm | 34,5 | 36,0 | 10 |
| K- 07 40 17 25 | LW 13 mm | 36,5 | 38,5 | 10 |
| K- 07 40 17 26 | LW 16 mm | 40,5 | 45,0 | 10 |
| K- 07 40 17 27 | LW 19 mm | 43,5 | 46,0 | 10 |
| K- 07 40 46 57 | LW 25 mm | 52,5 | 52,5 | 10 |