



K-XV AGM

Double nipples, parallel male thread

HANSA FLEX

Karakteristike

Radni tlak	Max. 20 bar
Materijal	Oplemenjeni čelik 1.4571

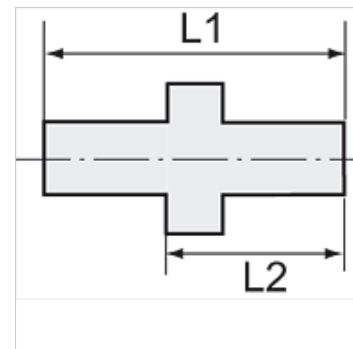

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatci na zahtjev.

Dodatne informacije

Further types and dimensions on request.

Artikli

Naziv	Navoj 1	Navoj 2	L1 (mm)	L2 (mm)	SW (veličina ključa)
K- 07 40 11 98	M 5	M 5	13,0	8,0	7 mm
K- 07 40 11 99	M 5	G 1/8	17,0	12,0	14 mm
K- 07 40 12 00	M 5	G 1/4	21,0	14,0	17 mm
K- 07 40 11 95	G 1/8	G 1/8	21,0	13,0	14 mm
K- 07 40 11 97	G 1/8	G 1/4	22,0	14,0	17 mm
K- 07 40 11 96	G 1/8	G 3/8	25,0	16,0	19 mm
K- 07 40 12 01	G 1/4	G 1/4	23,0	14,0	17 mm
K- 07 40 12 03	G 1/4	G 3/8	24,0	15,0	19 mm
K- 07 40 12 02	G 1/4	G 1/2	27,0	18,0	24 mm
K- 07 40 12 04	G 3/8	G 3/8	25,0	15,0	19 mm
K- 07 40 12 06	G 3/8	G 1/2	27,0	17,0	24 mm
K- 07 40 12 05	G 3/8	G 3/4	36,0	24,0	32 mm
K- 07 40 12 07	G 1/2	G 1/2	29,0	17,0	24 mm
K- 07 40 12 09	G 1/2	G 3/4	33,0	21,0	32 mm
K- 07 40 12 08	G 1/2	G 1	40,0	24,0	36 mm
K- 07 40 12 12	G 3/4	G 3/4	33,0	21,0	32 mm
K- 07 40 12 10	G 3/4	G 1	40,0	24,0	36 mm
K- 07 40 12 11	G 1	G 1	42,0	26,0	36 mm