
K-XV AGM


Double nipples, parallel male thread

HANSA-FLEX

Karakteristike

Radni tlak	Max. 20 bar
Materijal	Oplemenjeni čelik 1.4571



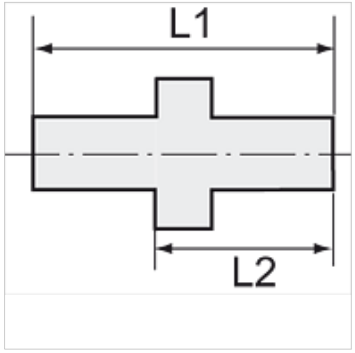

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatci na zahtjev.

Dodatne informacije

Further types and dimensions on request.

Artikl

Naziv	Navoj 1	Navoj 2	L1 (mm)	L2 (mm)	SW (veličina ključa)
K- 07 40 11 98	M 5	M 5	13,0	8,0	7 mm
K- 07 40 11 99	M 5	G 1/8	17,0	12,0	14 mm
K- 07 40 12 00	M 5	G 1/4	21,0	14,0	17 mm
K- 07 40 11 95	G 1/8	G 1/8	21,0	13,0	14 mm
K- 07 40 11 97	G 1/8	G 1/4	22,0	14,0	17 mm
K- 07 40 11 96	G 1/8	G 3/8	25,0	16,0	19 mm
K- 07 40 12 01	G 1/4	G 1/4	23,0	14,0	17 mm
K- 07 40 12 03	G 1/4	G 3/8	24,0	15,0	19 mm
K- 07 40 12 02	G 1/4	G 1/2	27,0	18,0	24 mm
K- 07 40 12 04	G 3/8	G 3/8	25,0	15,0	19 mm
K- 07 40 12 06	G 3/8	G 1/2	27,0	17,0	24 mm
K- 07 40 12 05	G 3/8	G 3/4	36,0	24,0	32 mm
K- 07 40 12 07	G 1/2	G 1/2	29,0	17,0	24 mm
K- 07 40 12 09	G 1/2	G 3/4	33,0	21,0	32 mm
K- 07 40 12 08	G 1/2	G 1	40,0	24,0	36 mm
K- 07 40 12 12	G 3/4	G 3/4	33,0	21,0	32 mm
K- 07 40 12 10	G 3/4	G 1	40,0	24,0	36 mm
K- 07 40 12 11	G 1	G 1	42,0	26,0	36 mm

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.