

# K-TR AG OR MS NI

Male hose fittings, parallel, with O-ring - nickel-plated brass

## Karakteristike

| | |
|---|---|
| **Radna temperatura** | Max. 80 °C (with O-ring, NBR) |
| **Tlak** | Max. 60 bar |
| **Materijal** | poniklani mjed |



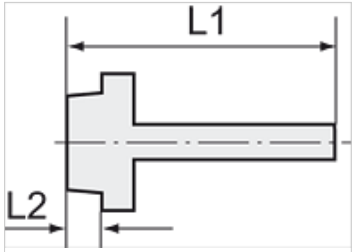


## Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatci na zahtjev.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikl

| Naziv | Navoj | za crijevo | L1 (mm) | L2 (mm) | SW (veličina ključa) |
|---|---|---|---|---|---|
| **K- 07 40 13 59** | G 1/8 | LW 6 mm | 30,0 | 6,5 | 14 mm |
| **K- 07 40 13 60** | G 1/8 | LW 8 mm | 31,0 | 6,0 | 15 mm |
| **K- 07 40 13 61** | G 1/8 | LW 9 mm | 31,0 | 6,0 | 15 mm |
| **K- 07 40 13 62** | G 1/4 | LW 6 mm | 32,0 | 8,0 | 17 mm |
| **K- 07 40 13 63** | G 1/4 | LW 9 mm | 33,0 | 8,0 | 18 mm |
| **K- 07 40 13 64** | G 1/4 | LW 12 mm | 33,0 | 8,0 | 18 mm |
| **K- 07 40 49 89** | G 1/4 | LW 8 mm | 32,0 | 8,0 | 17 mm |
| **K- 07 40 49 90** | G 1/4 | LW 10 mm | 33,0 | 8,0 | 17 mm |
| **K- 07 40 49 96** | G 1/4 | LW 13 mm | 33,0 | 8,0 | 18 mm |
| **K- 07 40 49 97** | G 3/8 | LW 6 mm | 33,0 | 9,0 | 20 mm |
| **K- 07 40 49 98** | G 3/8 | LW 8 mm | 33,0 | 9,0 | 20 mm |
| **K- 07 40 13 65** | G 3/8 | LW 9 mm | 34,0 | 9,0 | 21 mm |
| **K- 07 40 49 91** | G 3/8 | LW 10 mm | 34,0 | 9,0 | 20 mm |
| **K- 07 40 13 66** | G 3/8 | LW 12 mm | 34,0 | 9,0 | 21 mm |
| **K- 07 40 49 92** | G 3/8 | LW 13 mm | 34,0 | 9,0 | 21 mm |
| **K- 07 40 13 67** | G 1/2 | LW 12 mm | 36,0 | 11,0 | 26 mm |
| **K- 07 40 49 93** | G 1/2 | LW 13 mm | 36,0 | 10,0 | 24 mm |
| **K- 07 40 49 94** | G 1/2 | LW 16 mm | 40,0 | 10,0 | 25 mm |
| **K- 07 40 49 95** | G 1/2 | LW 19 mm | 40,0 | 10,0 | 24 mm |

*Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.*