

K-SV MS NI

Bulkhead connectors - nickel-plated brass


HANSA FLEX

Karakteristike

Radna temperatura Max. 150 °C

Tlak Max. 60 bar

Materijal poniklani mjed

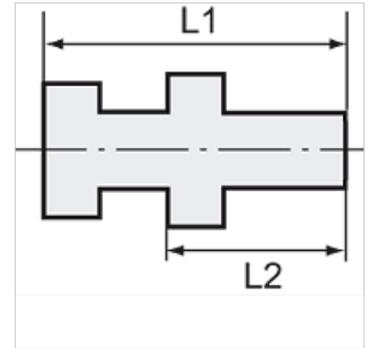

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Drugi podatci na zahtjev.

Opis

Suitable for air, water, oil, steam, etc.

Dodatne informacije

Further types and dimensions on request.

Artikli

| Naziv | Vanjski navoj | Unutarnji navoj | L1 (mm) | L2 (mm) | SW1 (mm) | SW2 (mm) |
|----------------|---------------|-----------------|------------|------------|-------------|-------------|
| K- 07 40 34 27 | M 16 x 1.5 | G 1/8 | 18,0 | 14,0 | 22 | 19 |
| K- 07 40 34 28 | M 20 x 1.5 | G 1/4 | 26,0 | 21,0 | 24 | 27 |
| K- 07 40 34 29 | M 26 x 1.5 | G 3/8 | 26,0 | 21,0 | 32 | 30 |
| K- 07 40 34 30 | M 28 x 1.5 | G 1/2 | 33,5 | 27,0 | 32 | 36 |