



K-TR AG OR VALUE LINE MS NI

Male hose fittings, incl. NBR-O-ring, parallel male thread

HANSA FLEX

Karakteristike

maks. radni tlak	60 bar
maks. radna temperatura	80 °C
Materijal	poniklani mjed

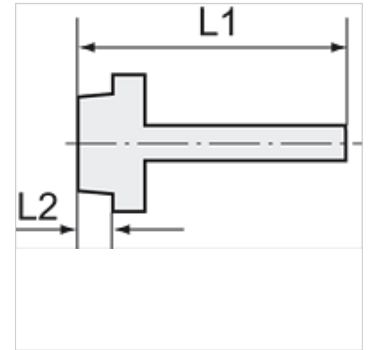

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatci na zahtjev.

Opis

For air, water, steam, oil, etc.

Artikli

Naziv	Navoj	za crijevo	L1 (mm)	L2 (mm)	SW (veličina ključa)
K- 07 40 14 19	G 1/8	LW 6 mm	30,0	6,5	14 mm
K- 07 40 14 20	G 1/8	LW 8 mm	30,0	6,5	14 mm
K- 07 40 14 21	G 1/8	LW 9 mm	30,0	6,5	14 mm
K- 07 40 14 22	G 1/4	LW 6 mm	32,0	8,0	17 mm
K- 07 40 14 23	G 1/4	LW 9 mm	32,0	8,0	17 mm
K- 07 40 14 24	G 1/4	LW 12 mm	33,0	8,0	17 mm
K- 07 40 14 25	G 3/8	LW 9 mm	33,0	9,0	20 mm
K- 07 40 14 26	G 3/8	LW 12 mm	34,0	9,0	20 mm
K- 07 40 14 27	G 1/2	LW 12 mm	35,5	10,0	25 mm