


K-VSTOK VALUE LINE MS NI

Plugs, incl. NBR-O-ring

HANSA FLEX

Karakteristike

maks. radni tlak	60 bar
maks. radna temperatura	80 °C
Materijal	poniklani mjed

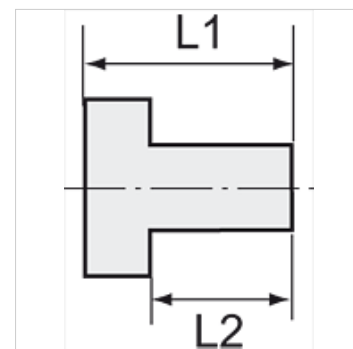

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Drugi podatci na zahtjev.

Opis

For air, water, steam, oil, etc.

Artikli

Naziv	Navoj	Imbus (mm)	L1 (mm)	L2 (mm)
K- 07 40 40 09	M 5	2,5	7,2	4,5
K- 07 40 40 10	G 1/8	5,0	9,5	6,5
K- 07 40 40 11	G 1/4	6,0	11,5	8,0
K- 07 40 40 12	G 3/8	8,0	12,5	9,0
K- 07 40 40 13	G 1/2	10,0	14,0	10,0