



K-VTL KUGELHAEHNE

Distributor block

HANSA FLEX

Karakteristike

Pričvršćenje	2 mounting holes in housing (screw size M 5)
Područje tlaka	Max. +10 bar, rough vacuum
Temperaturno područje	-10 °C to +100 °C
Navoji kuglastog ventila	G 1/4
Kućište	Die-cast aluminium
Kugla, vreteno	Ms 58, chrome-plated
Brtva kugle	PTFE
O prsten	NBR

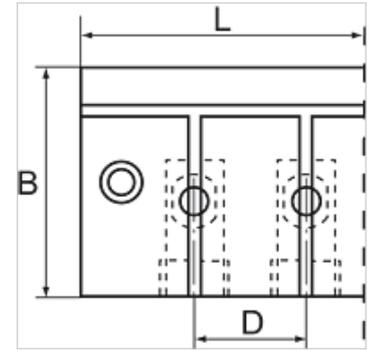

Napomena

Drugi podatci na zahtjev.

Opis

Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Artikli

Naziv	Broj kuglastih ventila	Izlaz navoja	Ulaz navoja	B (mm)	D (mm)	L (mm)
K- 07 40 40 46	6	G 3/8	G 3/8"	52,0	25,0	175,0
K- 07 40 40 47	8	G 3/8	G 3/8"	52,0	25,0	225,0
K- 07 40 40 45	10	G 3/8	G 3/8"	52,0	25,0	275,0