


K-VTST 3 AB MS

Distributor pieces, brass, with 3 outlets

HANSA FLEX

Karakteristike

| | |
|-------------------|---|
| Priključak | G 3/4 and G 1 incl. PTFE-sealing at outer thread, G 1 1/4 without sealing |
| Radni tlak | maks. 10 bar |

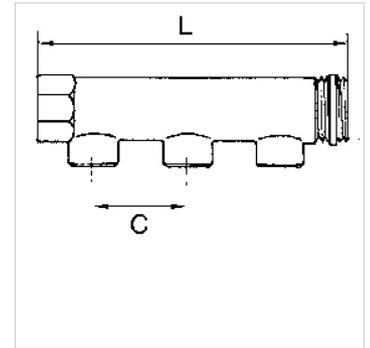

Napomena

Drugi podatci na zahtjev.

Opis

For assembling compressed air taps. End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

Artiki

| Naziv | Priključak izlaza | Priključak ulaza | C (mm) | L (mm) |
|----------------|-------------------|------------------|-----------|-----------|
| K- 07 40 40 55 | 3 x 1/2 male | 2 x 3/4 | 50,0 | 160,0 |
| K- 07 40 40 56 | 3 x 1/2 female | 2 x 3/4 | 50,0 | 160,0 |
| K- 07 40 40 57 | 3 x 1/2 male | 2 x 1 | 50,0 | 163,0 |
| K- 07 40 40 58 | 3 x 1/2 female | 2 x 1 | 50,0 | 163,0 |
| K- 07 40 40 59 | 3 x 1/2 male | 2 x 1 1/4 | 60,0 | 197,0 |
| K- 07 40 40 60 | 3 x 1/2 female | 2 x 1 1/4 | 60,0 | 197,0 |