

K-DRGREDV
Pressure reducing valves

Karakteristike

Ulazni tlak	Max. 15 bar
Priključak	G 1/4 internal / external
Materijal	Mjed



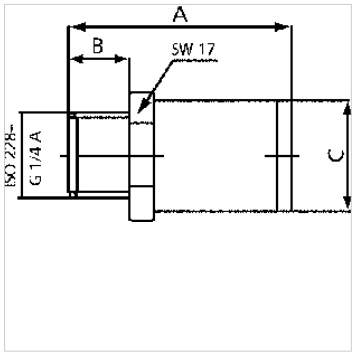

Napomena

Dependent on the input pressure P1, the initial pressure P2 can vary between -20% to +20%
Drugi podatci na zahtjev.

Opis

Industry, trade and repair shops often require working pressures of 15 bar or less. These pressure reducing valves, which are screwed directly onto the tool, enable the actually necessary working pressure to be set.
Benefits: Significantly reduced risk of accidents, Longer tool life with fewer malfunctions, Lower noise levels at the workplace.

Artikl

Naziv	Tlak namještanja	maks. protok (L/min)	A (mm)	B	Ø C (mm)	SW (mm)
K- 07 25 19 31	2,0	300	34,0	9,0 mm	17,0	17
K- 07 25 02 00	3,0	360	34,0	9,0 mm	17,0	17
K- 07 25 02 01	4,0	380	34,0	9,0 mm	17,0	17
K- 07 25 02 02	5,0	390	34,0	9,0 mm	17,0	17
K- 07 25 02 03	6,0	405	34,0	9,0 mm	17,0	17
K- 07 25 19 32	7,0	415	34,0	9,0 mm	17,0	17
K- 07 25 19 33	8,0	420	34,0	9,0 mm	17,0	17

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.