


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Karakteristike

| | |
|-------------------------------------|--|
| Ulazni tlak | Max. 30 bar |
| Temperatura medija | max. 130 °C |
| Okolna temperatura | Max. 60 °C |
| Protok | 2500 l/min |
| Veličina pora u filterskom elementu | 50 µm |
| Brtnveni materijal | FKM |
| Membrana | PTFE on NBR base |
| Materijal | stainless steel 1.4404 (AISI 316L) |
| Drain valve | Manual drain valve |
| Mjerenje vrijednosti protoka | At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar |

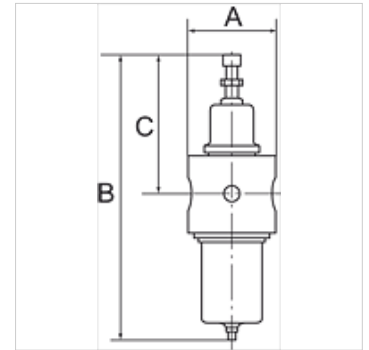

Napomena

Drugi podatci na zahtjev.

Opis

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Napomene uz narudžbu

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Artikli

| Naziv | Navoj | Regulacijsko područje | A (mm) | B | C (mm) |
|----------------|-------|-----------------------|-----------|----------|-----------|
| K- 07 25 06 52 | G 1/4 | 1.0 - 15.0 bar | 65,0 | 250,0 mm | 125,0 |
| K- 07 25 06 51 | G 1/2 | 1.0 - 15.0 bar | 80,0 | 260,0 mm | 127,0 |

Rezervni dijelovi

| | |
|---------------------------|--|
| K-HALTERBAUSATZ EDELSTAHL | Holder |
| K-MANO | Pressure gauges (CrNi steel type / connection on rear) |
| K-VERSCHLEI-SATZ | Set of wearing parts |