


# K-WV 3/2 ELK 230 VAC / 50HZ HANSA

3/2-way valves, electrically operated, with 230 VAC / 50 Hz solenoid

**HANSA FLEX**

## Karakteristike

|  |   |
|--|---|
| Ulazni tlak                                | 2 - 10 bar                                      |
| Temperaturno područje                      | -10 °C to +50 °C                                |
| Mediji                                     | komprimirani zrak                               |
| Snaga privlačenja izmjeničnog napona 50 Hz | 2,2 VA  |
| Trajanje uključanja                        | ED 100 %  |
| Električni priključak                      | Connector type C, ISO 15217, 2 poles +PE        |
| Pridržna snaga izmjeničnog napona 50 Hz    | 1,6 VA  |
| Potrošnja energije DC                      | 2,5 W   |
| Vrsta zaštite                              | IP 65   |
| Navoj priključka                           | Material: Die-cast zinc                         |
| Kućište                                    | Material: Grivory® (PA 66)                      |
| Mjerenje vrijednosti protoka               | At P2 = 6 bar, pressure drop $\Delta p = 1$ bar |

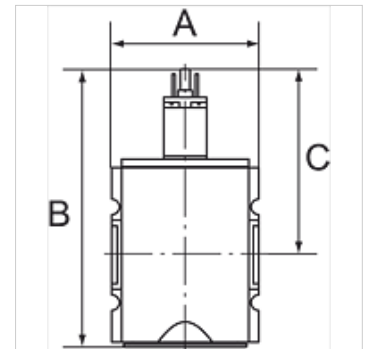

## Napomena

Drugi podatci na zahtjev.

## Opis

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is exhausted at the same time.

## Napomene uz narudžbu

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

## Artikli

| Naziv          | Navoj | Odvojak | Protok (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|---------|----------------|--------|----------|--------|
| K- 07 25 11 09 | G 1/4 | 1/4     | 2000           | 52,0   | 117,8 mm | 84,8   |
| K- 07 25 11 10 | G 3/8 | 1/4     | 2000           | 52,0   | 117,8 mm | 84,8   |
| K- 07 25 11 35 | G 3/8 | 1/2     | 4500           | 63,0   | 150,3 mm | 93,8   |
| K- 07 25 11 36 | G 1/2 | 1/2     | 4500           | 63,0   | 150,3 mm | 93,8   |
| K- 07 25 11 41 | G 3/4 | 1/2     | 12500          | 85,0   | 177,7 mm | 110,7  |
| K- 07 25 11 42 | G 1   | 1/2     | 12500          | 85,0   | 177,7 mm | 110,7  |

## Pribor

|                             |   |
|-----------------------------|---|
| K-SCHALLDAE SINTERBR S      | Silencers, sintered bronze, slotted                                 |
| K-SCHALLDAE SINTERBR GE MS1 | Silencers, sintered bronze, with brass hexagon nut and brass thread |

## Rezervni dijelovi

|                         |                            |
|-------------------------|----------------------------|
| K-HALTERBAUSATZ HANSA   | Holder HANSA               |
| K-VORSTEUERVENTIL HANSA | Replacement solenoid HANSA |
| K-GERAETESTECKER FORM C | Connector                  |