


# K-NEBELOEL PC-BEHÄEL SCHUTZK HANSA

Oil-mist lubricators

**HANSA FLEX**

## Karakteristike

|                              |   |
|------------------------------|---|
| Ulazni tlak                  | 0.5 - 16 bar                                    |
| Temperaturno područje        | -10 °C to +50 °C                                |
| Mediji                       | komprimirani zrak                               |
| Brtnveni materijal           | NBR   |
| Navoj priključka             | Material: Die-cast zinc                         |
| Spremnik                     | Polycarbonate (with bayonet lock)               |
| Kućiče                       | Material: Grivory® (PA 66)                      |
| Zaštitna košara              | Polyamide                                       |
| Nastavak za kapanje          | PA  |
| Vrsta ulja                   | CL 32 acc. to DIN 51517 - ISO VG 32             |
| Mjerenje vrijednosti protoka | At P2 = 6 bar, pressure drop $\Delta p = 1$ bar |

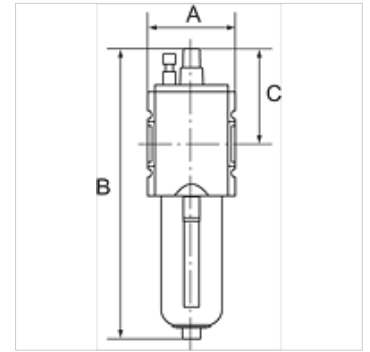

## Napomena

Drugi podatci na zahtjev.

## Opis

Oil-mist lubricators with excellent flow rates in modern design. These devices can be used to top up oil automatically. A hose must be connected to the threaded nipple on the oil bowl for this purpose. When the oil filling button on the top of the device is pressed, a Venturi nozzle opens and sucks oil into the bowl under vacuum.

## Artikli

| Naziv          | Navoj | Protok<br>(L/min) | A<br>(mm) | B        | C<br>(mm) |
|----------------|-------|-------------------|-----------|----------|-----------|
| K- 07 25 08 79 | G 1/4 | 2800              | 52,0      | 183,0 mm | 62,2      |
| K- 07 25 08 80 | G 3/8 | 2800              | 52,0      | 183,0 mm | 62,2      |
| K- 07 25 08 81 | G 3/8 | 8000              | 63,0      | 208,2 mm | 69,7      |
| K- 07 25 08 82 | G 1/2 | 8000              | 63,0      | 208,2 mm | 69,7      |
| K- 07 25 08 77 | G 3/4 | 16000             | 85,0      | 270,4 mm | 87,9      |
| K- 07 25 08 78 | G 1   | 16000             | 85,0      | 270,4 mm | 87,9      |

## Rezervni dijelovi

|                              |                               |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA        | Holder HANSA                  |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-TROPFAUFSATZ HANSA         | Drip attachment HANSA         |