


K-PRAEZI DRG MANO HANSA

Precision pressure regulators

HANSA FLEX

Karakteristike

| | |
|------------------------------|---|
| Ulazni tlak | Max. 16 bar |
| Temperaturno područje | -10 °C to +50 °C |
| Mediji | komprimirani zrak |
| Navoj priključka | Material: Die-cast zinc |
| Kućičšte | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Vlastita potrošnja zraka | 2.6 l/min at P2 = 6 bar (depending on secondary pressure) |
| Mjerenje vrijednosti protoka | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

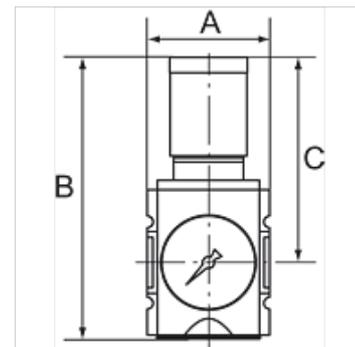

Napomena

Drugi podatci na zahtjev.

Opis

Precision diaphragm pressure regulators with self-relieving design and excellent flow rates in modern design for applications requiring an extremely accurate working pressure. The regulator button can be latched and locked.

Napomene uz narudžbu

The price does not include a key lock. Please order separately.

Artikli

| Naziv | Navoj | Regulacijsko područje | Protok (L/min) | A (mm) | B | C (mm) | Veličina |
|----------------|-------|-----------------------|----------------|--------|----------|--------|----------|
| K- 07 25 09 46 | G 1/4 | 0.1 - 1 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 47 | G 1/4 | 0.1 - 2 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 48 | G 1/4 | 0.2 - 4 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 49 | G 1/4 | 0.5 - 8 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 50 | G 1/4 | 0.5 - 10 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 51 | G 3/8 | 0.1 - 1 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 52 | G 3/8 | 0.1 - 2 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 53 | G 3/8 | 0.2 - 4 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 54 | G 3/8 | 0.5 - 8 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 55 | G 3/8 | 0.5 - 10 bar | 2700 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 09 56 | G 3/8 | 0.1 - 1 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 57 | G 3/8 | 0.1 - 2 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 58 | G 3/8 | 0.2 - 4 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 59 | G 3/8 | 0.5 - 8 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 60 | G 3/8 | 0.5 - 10 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 61 | G 1/2 | 0.1 - 1 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 62 | G 1/2 | 0.1 - 2 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 63 | G 1/2 | 0.2 - 4 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 64 | G 1/2 | 0.5 - 8 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 09 65 | G 1/2 | 0.5 - 10 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |

Pribor

K-STECKSCHLOSS Key lock

Rezervni dijelovi

| | |
|---------------------------|--------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |