


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Karakteristike

Ulazni tlak	1.5 - 16 bar
Izlazni tlak	0.5 - 8 bar
Temperaturno područje	-10 °C to +50 °C
Mediji	komprimirani zrak
Finoća filtra	5,00 µm
Navoj priključka	Material: Die-cast zinc
Spremnik	Polycarbonate (with bayonet lock)
Filterski element	Cellpor (PE)
Kućičšte	Material: Grivory® (PA 66)
Membrana	NBR
Zaštitna košara	Polyamide
Nastavak za kapanje	PA
Vlastita potrošnja zraka	Max. 1.5 l/min (depending on secondary pressure)
Mjerenje vrijednosti protoka	At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar

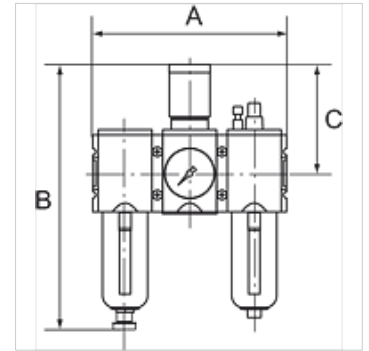

Napomena

Drugi podatci na zahtjev.

Opis

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Napomene uz narudžbu

The price does not include a key lock. Please order separately.

Artikli

Naziv	Navoj	Protok (L/min)	A (mm)	B	C (mm)	Ispust kondenzata
K- 07 25 14 37	G 1/4	1500	156,0	225,0 mm	95,5	Semi
K- 07 25 14 38	G 3/8	1500	156,0	225,0 mm	95,5	Semi
K- 07 25 14 39	G 3/8	3500	189,0	257,0 mm	110,0	Semi
K- 07 25 14 40	G 1/2	3500	189,0	257,0 mm	110,0	Semi
K- 07 25 14 41	G 3/4	12000	255,0	329,0 mm	137,0	Semi
K- 07 25 14 42	G 1	12000	255,0	329,0 mm	137,0	Semi
K- 07 25 14 43	G 1/4	1500	156,0	243,0 mm	95,5	Auto
K- 07 25 14 44	G 3/8	1500	156,0	243,0 mm	95,5	Auto
K- 07 25 14 45	G 3/8	3500	189,0	274,0 mm	110,0	Auto
K- 07 25 14 46	G 1/2	3500	189,0	274,0 mm	110,0	Auto
K- 07 25 14 47	G 3/4	12000	255,0	343,0 mm	137,0	Auto
K- 07 25 14 48	G 1	12000	255,0	343,0 mm	137,0	Auto

Pribor

K-STECKSCHLOSS Key lock

Rezervni dijelovi

K-HALTERBAUSATZ HANSA	Holder HANSA
K-ERSATZBEHAELTER HANSA POLY	Spare tank HANSA polycarbonat
K-FILTERELEMENT	Filter element
K-TROPFAUFSATZ HANSA	Drip attachment HANSA
K-SCHALTTAFELMUTTER HANSA	Nut HANSA
K-DICHTSATZ HANSA	Set of seals HANSA