
K-ANFAV MULTIFIX MINI


Start-up valves

HANSA-FLEX

Karakteristike

Ulazni tlak	Min. 2.5 bar, max. 16 bar
Temperatura medija	max. 60 °C
Okolna temperatura	Max. 60 °C
Protok	1600 l/min
Brtveni materijal	NBR
Kućište	Die-cast zinc
Mjerenje vrijednosti protoka	At P1 = 6 bar and pressure drop Δp = 1 bar

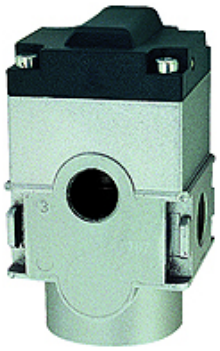

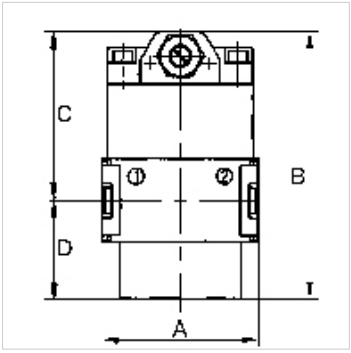

Napomena

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Drugi podatci na zahtjev.

Opis

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. The full cross-section of the regulator is opened at 50% of the input pressure. With adjustable restrictor!

Artikl

Naziv	Navoj	A (mm)	B	C (mm)	D (mm)
K- 07 25 11 53	G 1/4	45,0	77,5 mm	48,5	29,0

Pribor

K-HALTERBAUSATZ	Holder

Rezervni dijelovi

K-KOPPELPAKET MEHR	Coupling packet

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.