



# K-3/2-BKR MULTIFIX MINI

Ball valves

**HANSA FLEX**

## Karakteristike

Temperatura medija	max. 60 °C
Okolna temperatura	Max. 60 °C
Aktiviranje	Twist knob, rotatable 90°
Protok	1800 l/min
Odzračni priključak	Silencer G 1/4
Brtveni materijal	NBR
Kućište	Die-cast zinc
Mjerenje vrijednosti protoka	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

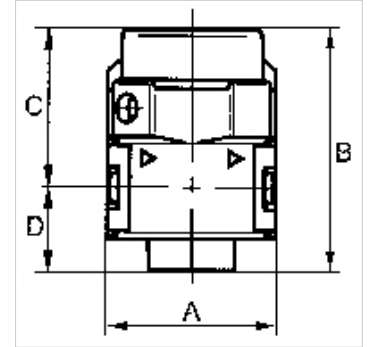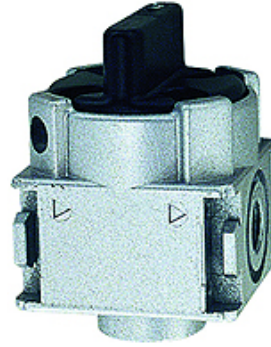

## Napomena

If several devices in the »multiflex-mini« Series are assembled together, the maximum working pressure is 12 bar.

Drugi podatci na zahtjev.

## Opis

Rotary switch can be turned 90°, lockable, with relief port

## Artikli

Naziv	Navoj	A (mm)	B	C (mm)	D (mm)	Veličina
K- 07 25 11 56	G 1/8	40,0	57,6 mm	37,6	20,0	0
K- 07 25 11 57	G 1/4	40,0	57,6 mm	37,6	20,0	0

## Rezervni dijelovi

K-KOPPELPAKET MEHR	Coupling packet
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-SCHALLDAE SINTERBR SCHLITZ	Silencers, sintered bronze, slotted