
K-NEBELOELER MINI

Mini oil-mist lubricator

Karakteristike

Radni tlak	min. 2 bar - max. 6 bar
Temperatura medija	max. 50 °C
Okolna temperatura	Max. 50 °C
Položaj ugradnje smjera protoka	Oil intake at the lowest point/any
Spremnik ulja	Polycarbonate
Vrsta ulja	CL 32 acc. to DIN 51517 - ISO VG 32



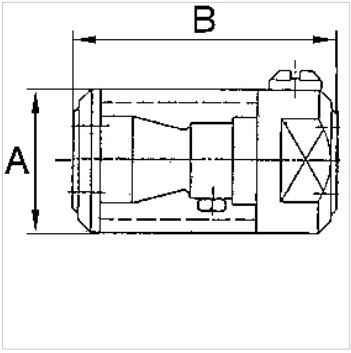

Napomena

Drugi podatci na zahtjev.

Opis

For mounting on pneumatic impact tools (nail drivers, tackers, screwdrivers) which work intermittently. Also suitable for tools with continuous compressed air demand (grinding and polishing machines). Fixed drip rate: Approx. 0.4 cm3 per 100 work cycles, one filling = 3000 work cycles. Oil consumption in continuous operation (at 6 bar): 0.15 cm3 / Nm3 (varies depending on ambient temperature and oil used).

Artikl

Naziv	Navoj	A (mm)	B	DN
K- 07 25 09 11	G 1/4	33,0	60,0 mm	8
K- 07 25 09 12	G 3/8	33,0	60,0 mm	8

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.