


# K-DRG VORDRUCK STANDARD-MINI

Pressure regulators

**HANSA FLEX**

## Karakteristike

|                              |                                                                |
|------------------------------|----------------------------------------------------------------|
| Ulazni tlak                  | Max. 25 bar                                                    |
| Temperatura medija           | max. 60 °C                                                     |
| Okolna temperatura           | Max. 60 °C                                                     |
| Brtnveni materijal           | NBR                                                            |
| Pokrov s oprugom             | POM-brass                                                      |
| Kućište                      | Die-cast zinc, painted silver                                  |
| Mjerenje vrijednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Drugi podatci                | User manual on request                                         |

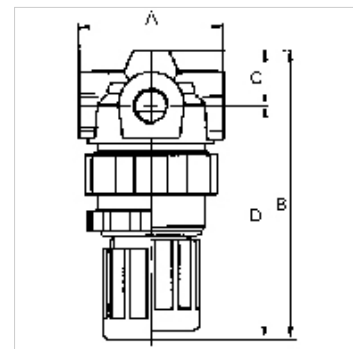

## Opis

Compact, reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design. The pressure setting can be locked by pushing the knob down.

## Artikli

| Naziv          | Navoj | Regulacijsko područje | Protok (L/min) | A (mm) | B       | C (mm) | D (mm) | DN |
|----------------|-------|-----------------------|----------------|--------|---------|--------|--------|----|
| K- 07 25 03 28 | G 1/8 | 0.1 - 3 bar           | 330            | 40,0   | 76,3 mm | 15,0   | 61,3   | 5  |
| K- 07 25 03 29 | G 1/8 | 0.5 - 6 bar           | 330            | 40,0   | 76,3 mm | 15,0   | 61,3   | 5  |
| K- 07 25 03 30 | G 1/8 | 0.5 - 10 bar          | 330            | 40,0   | 76,3 mm | 15,0   | 61,3   | 5  |
| K- 07 25 03 31 | G 1/8 | 0.5 - 16 bar          | 330            | 40,0   | 76,3 mm | 15,0   | 61,3   | 5  |
| K- 07 25 03 32 | G 1/4 | 0.1 - 3 bar           | 330            | 40,0   | 76,3 mm | 15,0   | 61,3   | 5  |
| K- 07 25 03 33 | G 1/4 | 0.5 - 6 bar           | 330            | 40,0   | 76,3 mm | 15,0   | 61,3   | 5  |
| K- 07 25 03 34 | G 1/4 | 0.5 - 10 bar          | 330            | 40,0   | 76,3 mm | 15,0   | 61,3   | 5  |
| K- 07 25 03 35 | G 1/4 | 0.5 - 16 bar          | 330            | 40,0   | 76,3 mm | 15,0   | 61,3   | 5  |

## Rezervni dijelovi

|                            |                                                           |
|----------------------------|-----------------------------------------------------------|
| K-HALTERBAUSATZ            | Holder                                                    |
| K-SCHALTTAFELMUTTER        | Nut                                                       |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples                                            |
| K-XV AGM MS NI             | Double nipples, parallel male thread, nickel-plated brass |
| K-VERSCHLEI-SATZ           | Set of wearing parts                                      |