

K-ANFAV VARIOBLOC

Manifolds

Karakteristike

Radni tlak	2 - 25 bar
Mjerenje vrijednosti protoka	At P1 = 6 bar and pressure drop Δp = 1 bar

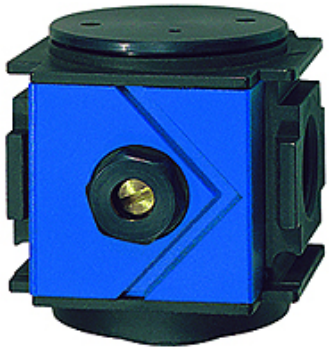

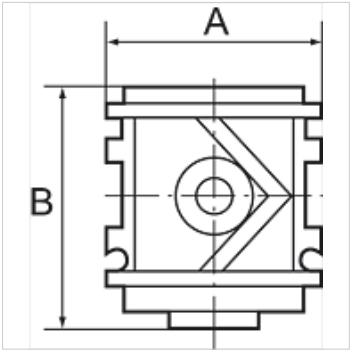

Napomena

Drugi podatci na zahtjev.

Opis

For slow pressure build-up in pneumatic systems, e.g. after an emergency stop. The valve opens to full flow at approximately 60% of the set operating pressure.
The filling time can be set by turning the adjusting screw. Used in combination with multi-piece service units.

Artikl

Naziv	Navoj	Protok (L/min)	A (mm)	B	Radni tlak bari
K- 07 25 11 84	G 1/4	1200	48,0	54,0 mm	2 - 25 bar
K- 07 25 11 85	G 3/8	1400	48,0	54,0 mm	2 - 25 bar
K- 07 25 11 86	G 1/2	3800	70,0	72,0 mm	2 - 25 bar
K- 07 25 11 87	G 3/4	4200	70,0	72,0 mm	2 - 25 bar
K- 07 25 11 88	G 1	4200	124,0	72,0 mm	2 - 25 bar

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.