


# K-DRG DRVS VARIOBLOC

Pressure regulators with pressure supply at both ends

**HANSA FLEX**

## Karakteristike

|                              |   |
|------------------------------|---|
| Ulazni tlak                  | Max. 25 bar   |
| Temperatura medija           | max. 50 °C  |
| Okolna temperatura           | Max. 50 °C  |
| Brtveni materijal            | NBR   |
| Pokrov s oprugom             | POM-brass   |
| Kućište                      | Die-cast zinc   |
| Mjerenje vrijednosti protoka | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

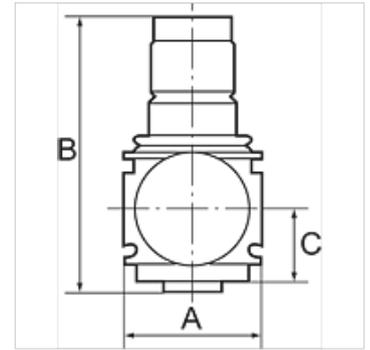

## Napomena

Drugi podatci na zahtjev.

## Opis

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down. <br>By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

## Napomene uz narudžbu

Pressure regulators are also available in lockable version. Please ask for more information.

## Artikli

| Naziv          | Navoj | Regulacijsko područje | Protok (L/min) | A (mm) | B       | C (mm) |
|----------------|-------|-----------------------|----------------|--------|---------|--------|
| K- 07 25 04 33 | G 1/4 | 0.5 - 6 bar           | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 34 | G 1/4 | 0.5 - 10 bar          | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 35 | G 1/4 | 0.5 - 16 bar          | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 36 | G 3/8 | 0.5 - 6 bar           | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 37 | G 3/8 | 0.5 - 10 bar          | 1800           | 48,0   | 98,0 mm | 26,0   |
| K- 07 25 04 38 | G 3/8 | 0.5 - 16 bar          | 1800           | 48,0   | 98,0 mm | 26,0   |

## Rezervni dijelovi

K-VERSCHLEI-SATZ VARIOBLOC Set of wearing parts