

K-3/2-BKR VARIOBLOC

Ball valves

Karakteristike

Okolna temperatura	Max. 80 °C
Radni tlak	Max. 20 bar
Mjerenje vrijednosti protoka	At P1 = 6 bar and pressure drop Δp = 1 bar

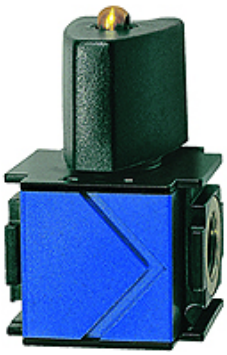

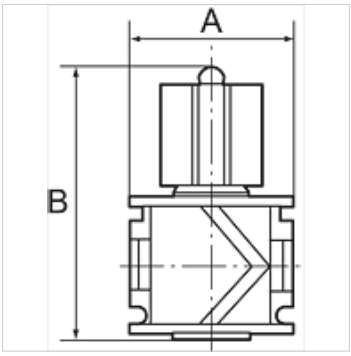

Napomena

Drugi podatci na zahtjev.

Opis

Used as the main shut-off element, especially for flanging onto the start of a variobloc service unit. With pressure relief and silencer. Can be locked with a standard padlock.

Artikl

Naziv	Navoj	Protok (L/min)	A (mm)	B
K- 07 25 11 89	G 1/4	4300	48,0	80,0 mm
K- 07 25 11 90	G 3/8	4400	48,0	80,0 mm
K- 07 25 11 91	G 1/2	9000	70,0	92,0 mm
K- 07 25 11 92	G 3/4	11000	70,0	92,0 mm
K- 07 25 11 93	G 1	11000	124,0	92,0 mm

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.