


K-WTEH 3-TLG MET SICH TROPF VARIOBL

Service units, 3-piece with metal bowl, incl. sight glass and metal sight dome

HANSA FLEX

Karakteristike

| | |
|---------------------------------------|---|
| Ulazni tlak | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Temperatura medija | max. 50 °C |
| Okolna temperatura | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Veličina pora u filterarskom elementu | 40 µm |
| Brtveni materijal | NBR |
| Pokrov s oprugom | POM |
| Kućište | Die-cast zinc |
| Membrana | NBR |
| Nastavak za kapanje | PA |
| Drain valve | Manual |
| Mjerenje vrijednosti protoka | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

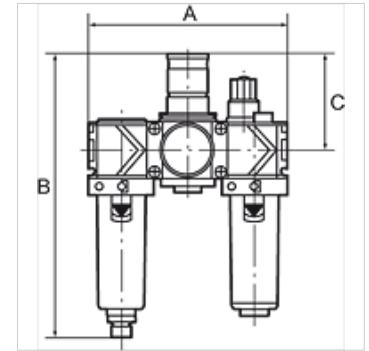

Napomena

Drugi podatci na zahtjev.

Opis

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Napomene uz narudžbu

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Dodatne informacije

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

Artikli

| Naziv | Navoj | Regulacijsko područje | Protok (L/min) | A (mm) | B | C (mm) |
|----------------|-------|-----------------------|----------------|--------|----------|--------|
| K- 07 25 14 12 | G 1/4 | 0.5 - 10 bar | 1500 | 144,0 | 201,0 mm | 68,0 |
| K- 07 25 14 14 | G 3/8 | 0.5 - 10 bar | 1800 | 144,0 | 201,0 mm | 68,0 |
| K- 07 25 14 16 | G 1/2 | 0.5 - 10 bar | 3400 | 210,0 | 274,0 mm | 98,0 |
| K- 07 25 14 18 | G 3/4 | 0.5 - 10 bar | 5000 | 210,0 | 274,0 mm | 98,0 |
| K- 07 25 14 20 | G 1 | 0.5 - 10 bar | 5000 | 264,0 | 274,0 mm | 98,0 |

Rezervni dijelovi

| | |
|----------------------------------|--|
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |
| K-FILTERELEMENT VARIOBLOC | Filter element |
| K-ERSATZBEHAELTER VARIOBLOC POLY | Spare tank Polycarbonat |
| K-TROPFAUFSATZ VARIOBLOC | Drip attachment |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |