


# K-WTEH 2-TLG MET SICH TROPF VARIOBL

Service units, 2-piece with metal bowl, incl. sight glass and metal sight dome

**HANSA FLEX**

## Karakteristike

|                                      |   |
|--------------------------------------|---|
| Ulazni tlak                          | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)      |
| Temperatura medija                   | max. 50 °C  |
| Okolna temperatura                   | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl)        |
| Veličina pora u filteraskom elementu | 40 µm   |
| Brtveni materijal                    | NBR   |
| Pokrov s oprugom                     | POM   |
| Kućište                              | Die-cast zinc   |
| Membrana                             | NBR   |
| Nastavak za kapanje                  | PA  |
| Drain valve                          | Manual  |
| Mjerenje vrijednosti protoka         | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

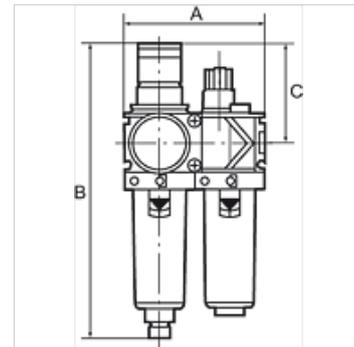

## Napomena

Drugi podatci na zahtjev.

## Opis

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## Napomene uz narudžbu

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Dodatne informacije

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

## Artikli

| Naziv          | Navoj | Regulacijsko područje | Protok (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|-----------------------|----------------|--------|----------|--------|
| K- 07 25 13 86 | G 1/4 | 0.5 - 10 bar          | 1500           | 96,0   | 203,0 mm | 68,0   |
| K- 07 25 13 88 | G 3/8 | 0.5 - 10 bar          | 1800           | 96,0   | 203,0 mm | 68,0   |
| K- 07 25 13 90 | G 1/2 | 0.5 - 10 bar          | 3400           | 140,0  | 273,0 mm | 98,0   |
| K- 07 25 13 92 | G 3/4 | 0.5 - 10 bar          | 5000           | 140,0  | 273,0 mm | 98,0   |
| K- 07 25 13 94 | G 1   | 0.5 - 10 bar          | 5000           | 194,0  | 273,0 mm | 98,0   |

## Rezervni dijelovi

|                                  |  |
|----------------------------------|--|
| K-VERSCHLEI-SATZ VARIOBLOC       | Set of wearing parts                           |
| K-FILTERELEMENT VARIOBLOC        | Filter element                                 |
| K-ERSATZBEHAELTER VARIOBLOC POLY | Spare tank Polycarbonat                        |
| K-TROPFAUFSATZ VARIOBLOC         | Drip attachment                                |
| K-ABLASSVENTIL AUTO              | Fully-automatic drain valve with Adapter G 1/8 |