


K-FI RUECKSPUELFILTER

Back-flushing filters

HANSA FLEX

Karakteristike

Ulazni tlak	Max. 16 bar
Okolna temperatura	+5 °C to +40 °C
Temperatura vode min.	5 °C
Temperatura vode max.	30 °C
Veličina pora u filterarskom elementu	90 µm (first filter element), 110 µm (second filter element)
Kućište	Brass
Kućište sīta	Impact-resistant plastic
Učīn protoka	at $\Delta p = 0.2$ bar
Drugi podatci	DVGW Zertifikat

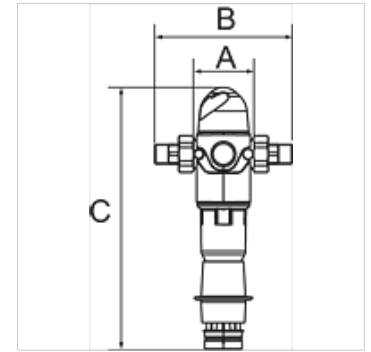

Napomena

Drugi podatci na zahtjev.

Opis

For filtering drinking and domestic water in addition to well, process and cooling water for once-through cooling systems. These filters protect the water pipes and all water-carrying parts of the system on the downstream side against malfunctions and corrosion damage. The filter candle must be cleaned manually at regular intervals by back-flushing (flushing out dirt particles). Integrated back-flushing element with suction elements, back-flushing lever, wing lever for back-flushing element, hose connection for flushing water.

Artikl

Naziv	Navoj	DN	Protok, kvs-vrijednost (m ³ /h)	A (mm)	B	C (mm)
K- 07 25 10 08	R 3/4	20	3,0	80,0	184,0 mm	352,5
K- 07 25 10 09	R 1	25	3,5	80,0	184,0 mm	352,5
K- 07 25 10 10	R 1 1/4	32	4,0	106,4	228,0 mm	352,5

Rezervni dijelovi

K-FILTEREINSATZ	Filter insert
K-KUNSTSTOFFBEHAELTER	Plastic tank